




**DESCRIPTION:**


- Multi-functional LED tracklight with zoomable beam angle to focus on specific features and adjustable lighting sharpness.
- Ideal for office, commercial, leisure, hospitality and retail applications.
- CRI 90, UGR < 19, efficacy of up to 46.6lm/w and an output of up to 700lm
- Beam angle is zoomable between 18° - 30°.
- Diverse spots allowing for a range of different shaped beams.

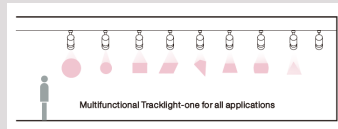

**TECHNICAL:**

Mains Voltage (V):	220-240
Power (W):	15
Ingress Protection (IP):	20
Optional (IP):	-
MacAdam Ellipse:	3 Step MacAdams
CRI:	>90
UGR:	<10

Efficiency (lm/W):	46.6
Operating Temp (oC):	25°
Operating Hours:	50,000
Optic Diffuser:	Lens
Finish:	White or Black
Warranty:	5 Years
Installation:	Tracklight

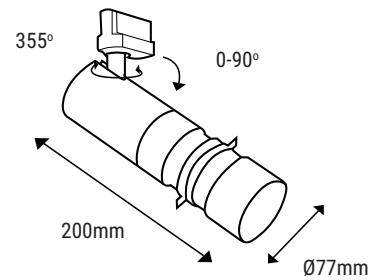

**SPECIFICATION:**



CASAMBI



**UGR**  
10

White Bezel    Black Bezel



**HOW TO ORDER:** Fill out the Code Builder on the next page



Please note: specification values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/down for illustrative purposes. Tolerance range of optical and electrical data is +/-10%. We reserve the right to amend or change details without prior notification.

Chiara Lighting Ltd | Unit 18, Calderdale Business Park, Club Lane, Halifax, HX2 8DB United Kingdom  
 T: +44 (0)330 0571 888 | E: hello@chiaralighting.com | W: www.chiaralighting.com





MODEL	CRI	CCT	WATTAGE	BEAM	BEZEL FINISH	BAFFLE FINISH	CONTROL	ACCESSORIES
ZoomArt (ZA)	>90 (9)	2700K (27) 3000K (30) 4000K (40)	15W (15)	18° - 30° (18)	White (W) Black (B)	White (W) Black (B)	Switched (S) Phase Dim (PD) DALI (DA) Casambi (C)	No Accessory (X)

Example code:

**ZA** — **9** — **27** — **15** — **18** — **W** — **W** — **S** — **X**

**ZA.9.27.15.18.W.W.S.X**

LUMEN OUTPUT

2700K = 700lm  
3000K = 700lm  
4000K = 700lm