

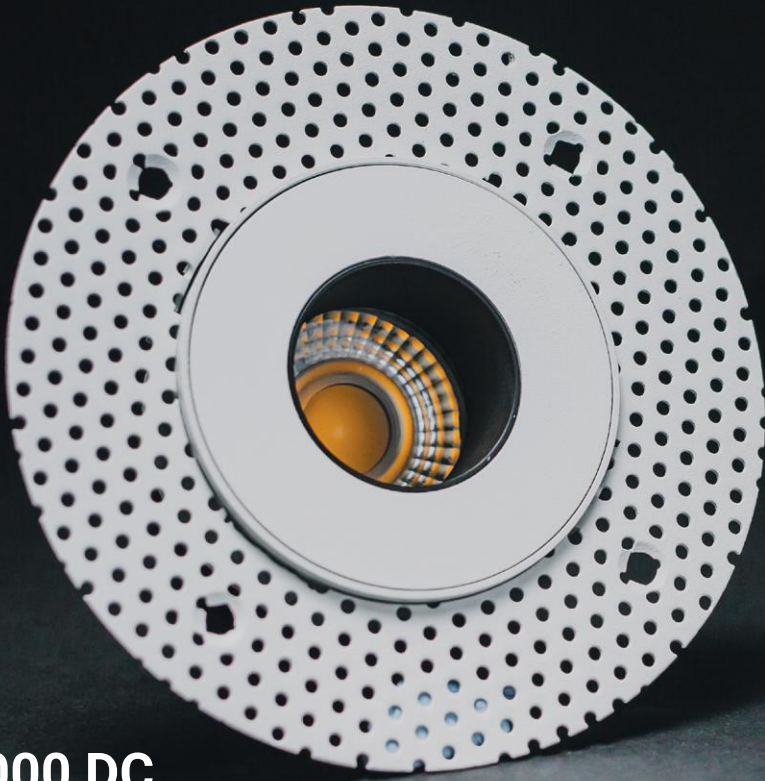
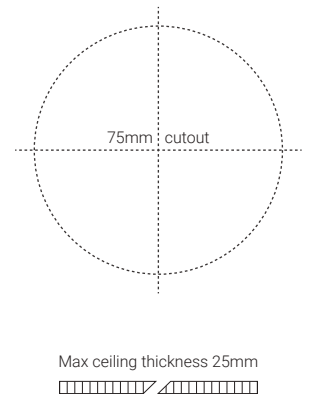


ARCH DL

SMALL ROUND ADJUSTABLE
TRIMLESS

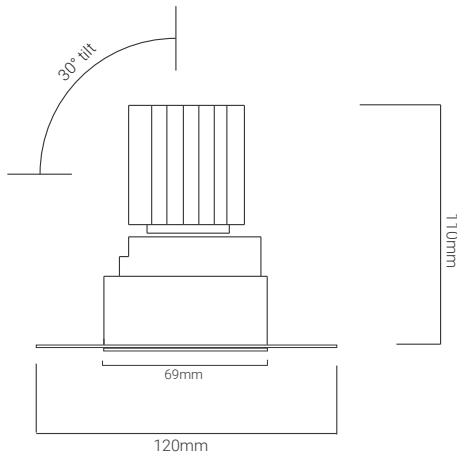


LE1000 DC

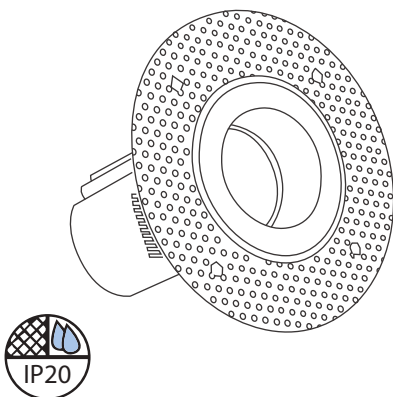

MODEL: ADLRAT



 chiaralighting.com

 0330 0571 888

 hello@chiaralighting.com



DESCRIPTION

The plaster-in baffle on the Arch DL Small Round Adjustable Trimless creates a seamless appearance, whilst the small aperture offers a more focused beam of light, perfect for hospitality, residential and leisure applications. The deep recessed light source offers optimum glare control and visual comfort. For easy tool-free maintenance, the light source is accessible from below.

TECHNICAL

Mains Voltage (V):	220-240	LE1000 DC	CT	LMS	tcW	Current
Mains Frequency (Hz):	50-60	Engine lumen values	2700k	619	6.5	180mA
CRI (Ra)	92		3000k	634	6.5	180mA
MacAdam Ellipse:	3 SCDM		4000k	669	6.5	180mA
Operating Temp (oC):	-20°c TO +40°c		2700k	837	9.3	250mA
Operating Hours:	50,000 @ L70 B50		3000k	857	9.3	250mA
Lumen Output:	Up to 1270lm		4000k	904	9.3	250mA
Body:	Die-Cast Aluminium / Injection moulded PC		2700k	1002	11.3	300mA
Optic:	Optical Lens (PC)		3000k	1026	11.3	300mA
Bezel Finish:	Ral9016 and Ral9005 fine texture powder coat		4000k	1083	11.3	300mA
Warranty:	5 Years	Emergency Options:				
Control options:	PhaseDim - Leading and trailing edge (PD) Switched (S) DALI (D) Casambi (C)					EM- Emergency with Remote Indicator EMD- Emergency DALI / Self Test with Remote Indicator

*Lumen output stated is light engine data only. LDT files are available to download from our website or can be requested from the Sales team.

COLOR SWATCHES



ACCESSORIES



CODE BUILDER

Light Fitting

MODEL	BEZEL	BAFFLE	ACCESSORIES
Arch DL Small Round Adjustable Trimless ADLRAT	White (W)	White (W) Black (B) Matt (M) Gold (G)	Honeycomb (HC) Frosted Glass (FG) Clear Glass (CG) FR60

Luminaire Housing

ENGINE	CRI	CCT	WATTAGE	BEAM ANGLE	CONTROL
LE1000DC	92 (9)	2700k (27) 3000k (30) 4000k (40)	6.5W (7) 9.3W (9) 11.3W (11) 13.3W (13)	12° (12) 24° (24) 36° (36) 60° (60)	Switched (S) Phase Dim (PD) DALI (D) Casambi (C)

ADLRAT . W . W . FR60.HC + LE1000DC . 9 . 27 . 10 . 12 . PD